





Westbrook features a 1" tub ledge and integrated overflow for minimalist design

# Westbrook



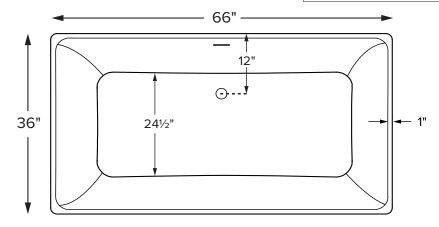


Drain Rough-In Measurement



Requires use of a wall-mounted or freestanding tub filler.

Shown as Soaker.

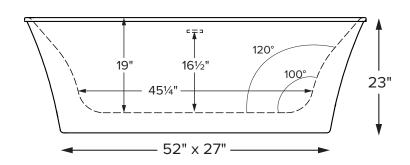

#### **ELECTRICAL COMPONENTS & SPECIFICATIONS**

Hydrotherapy Package	Components Included	110V GFCI
Air Massage	heated blower	1-15 amp
Air Massage Elite	heated blower, chromatherapy	1-15 amp

Electrical requirements may change with the addition of optional therapy components.

See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7

See the Installation & Operation Manual for more details. MTI's Customer Service: Monday-Friday 8am-6pm EST 800-783-8827 or service@mtibaths.com

- Before discarding tub packaging, check for accessories that may be packaged inside.
   All product measurements are ±1/2".
   Specifications and configurations are subject to change without notice.
   Measurements herein supersede all others published prior to publication date below.

### IMPORTANT ORDERING & INSTALLATION INFORMATION:

- · Before ordering or installing, please consider future access to equipment.
- No access panel. Tub features slotted integrated overflow with toe tap drain.
- Air baths require job site preparations for remote mounting the blower and required check valve. Check valve must be installed higher than the rim of the tub.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- Radiance placed on floor locations will affect placement of air jets.
- Faucet valves cannot be installed on this tub model.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.



- Airbath blower and Elite keypad ship loose for remote installation on site.
- Secondary remote check valve must be installed higher than the rim of the tub.
- See the Installation & Operation Manual for more details.

Westbrook

MODEL 232 66" x 36" x 23"

Hydrotherapy	Package Contents	Acrylic CXL®		DoloMatte <sup>®</sup>	
Packages		Part #	MSRP	Part #	MSRP
Soaker	Soaking bath - no jets; includes a pre-leveled foam base and integrated slotted overflow with toe-tap drain kit in chrome.	S232	\$5,660	S232DM	\$6,380
Air Massage	20 air jets, heated air blower, pre-leveled foam base and integrated slotted overflow with toe-tap drain kit in chrome. Blower and control boxes must be remote located.	AST232	\$8,945	AST232DM	\$9,665
Air Massage Elite	30 air jets, heated air blower, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base and integrated slotted overflow with toe-tap drain kit in chrome. Blower, control boxes and Spa Mode keypad must be remote located.	AE232	\$10,655	AE232DM	\$11,375

#### RECOMMENDED SENSORY THERAPIES

Chromatherapy

(LE) \$800 underwater lighting 2 LED lights included

**Audiotherapy** 

(STEREOBT) \$1,390 2 transducers with bluetooth and amplifier (BTREMOTE) \$600 bluetooth remote (STEREOH202) \$1,575 4 transducers amplifier not included

Thermaltherapy

(RAD100) **\$1,595** Radiance® 2 heated zones included

Options Must be ordered at time of purchase

Standard Colors White (CWH) DoloMatte available in matte white only. Biscuit (CBS) Not available for DoloMatte.

Quick Ship reduces lead time (QSPRI) \$430

Please call for availability

Textured Bottom (TXTBTM) Acrylic CXL® only \$105

DoloMatte® exceeds ANSI A137.1/A326.3 and AS HB198 slip tests.

Accessories

Pillows from \$180

Teak Bath Mat (TKMAT3018) \$815

Custom sizes also available. Contact MTI for details and pricing.

**Teak Tub Tray** 

Slatted (TK-TRAY1) \$500 Solid (TK-TRAY2) \$570

Floor-Mounted High-Flow Tub Filler

Contemporary

Chrome (FILLC) \$1,480

Brushed Nickel (FILLBN) \$1,710

Faucet Stand SculptureStone® Standard

Small 3-hole capacity Large 5-hole capacity 141/4" w x 213/4" h 22" w x 213/4" h Matte (STAND) \$725 Matte (STANDL) \$855

+\$430 gloss finish upcharge (SSGLOSSSNK)

## Drains & Overflow Kits Must be ordered at time of purchase

Integrated Overflow with Toe Tap **Slotted Overflow** 

PVC drain - Chrome (SLOTIOC) included

Finish Upcharge

White (SLOTIOWHU) \$65

Brushed Nickel (SLOTIOBNU) \$65

Polished Nickel (SLOTIOPNU) \$105

**Round Overflow** 

Chrome (RIOC) may substitute slotted overflow

Finish Upcharge

White (RIOWH) \$120

Brushed Nickel (RIOBN) \$120

Polished Nickel (RIOPN) \$120

Brass Tailpiece (WIOBS) \$85 May be ordered separately

Quick Connect Drain - (WOQ) \$460

Rev 02 07 2023