

Cinq™ Single-function filtered showerhead, 1.75 gpm K-33631-G

Features

- Single-function showerhead with 5-1/2" (140 mm) diameter sprayface
- Five-layer filtration system reduces scale buildup in your shower and includes an activated charcoal filter to reduce impurities such as chlorine and heavy metals
- Recommend replacing filter every six months for optimum performance
- Integrated dial tracks suggested filter replacement date
- Filter easily slides out with a 30° turn of the sprayface
- Optimized sprayface minimizes wasteful overspray and increases cleaning and hair-rinsing performance
- Full coverage spray produces an encompassing spray ideal for everyday use
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) maximum flow rate at 45 psi (3.1 bar)
- Box includes: Showerhead, one filter, wrench, sealant tape
- K-33632 replacement filters available (sold separately)

Material

Premium material construction for durability and reliability

Installation

- 1/2 -14 NPT connection
- Shower arm and flange sold separately





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) IAPMO Certification

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

CP
BN
BL
2MB

- Polished Chrome
 Vibrant® Brushed Nickel
- . Matte Black

B Brass



Cinq™

KOHLER. Faucets

Single-function filtered showerhead, 1.75 gpm K-33631-G

Ø 5-1/2" (140 mm)

0

۲

۲

0

6

0

0

0000


0 0

0

0

@ @

0

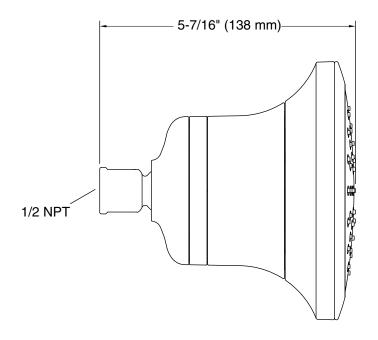

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum
flow:1.75 gal/min (6.6 l/min)Pressure:45 psi (3.1 bar)

Notes

For use with automatic compensating valves rated at 1.4 gal/min (5.3 l/min) or less. Install this product according to the installation guide.

