Drawn:

KJG

Checked:

JRM

Approved:

JHB

Date:

## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.

EC-3130-4DP

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

ChekPoint*		This Space for Architect/Engineer	r Approval
	8	Job Name	Date
ADA Compliant	Cold	Model Specified	Quantity
0.5/01	Cold	Customer/Wholesaler	
2 5/8" [67mm]		Contractor	
[O/IIIII]		Architect/Engineer_	
T	Hot		
N N		// 0"	
	0	5 7/16" [137mm]	-
	Swivel Gooseneck w/ 2.2 GPM [8.3 L/min]		
Internal Above Deck	Vandal Resistant Aera Rigid Conversion Requ		<u> </u>
Electronics w/ Flow	014200-45 Lock Wash		
Control Setting Switches.	(Included)	<i>}</i>	
Lithium Battery.	Temperature Mixing Washington Coded Index		11 7/16"
	(Optional Plug Includ	ed to	[290mm]
Polished Chrome —	Replace Handle Whe	1)	
Plated Deck Plate w/ Deck Gasket	Tomporatare is 1 1880	et) [181mm]	
W Deck Gasket	Mounting Surface	ce l	9•
T	I		
6" [152mm]		1 1/2"	
[13211111]	4"	[38mm] /	
	[102mm]	Maximum /	
		ThicknessShow	n w/ Optional
	19" [483mm] Flo		nstalled When Temperature
	Stainless Steel		set (Included)
	Hoses		
	1/2" NPSM Swi	ivel Ends	
Optional 100-240 VAC	w/ Filter Washe		
Adapter w/ 71" [1800mm]	•		
Power Cord	Check Valve Ac w/ 3/8" Compre		
D 11 D : .	(9/16-24 UN) In		
Rough-In Requirement: $\emptyset$ 1 1/4" [32mm] Center Mounting Ho	le		
(2) $\phi$ 1 1/8" [29mm] Side Mounting He	oles		
Product Specifications: Chrome Plated Brass Above Deck	Flectronics Faucet Deck	Product Compliance:	
4" c/c Deck Plate, Swivel/Rigid Go	oseneck, 2.2 GPM VR Ae	erator, NSF 61 - Section 9	B125.1
Point-of-UseTemperature Control, Stainless Steel Flexible Supply Lin	Battery or AC Adapter Po	owered. NSF 372 (Low Lead Cor	ntent)
olailiiess oleei Fiexibie Suppiy Lin			

UL 1951

Scale:

1:6

Sheet: 1

08/26/16



## T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.


EC-3130-4DP

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

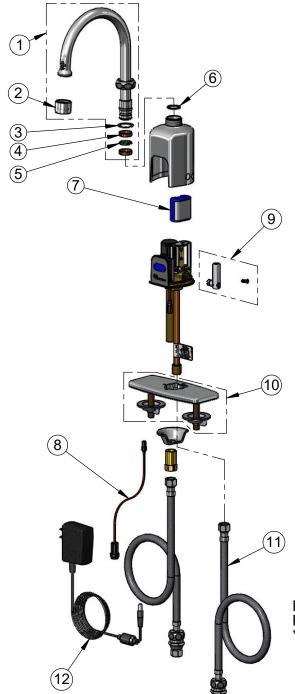

1 .	ΓΕΜ NO.	SALES NO.	DESCRIPTION	
	1	018490-40	Swivel Gooseneck w/ VR 2.2 GPM Aerator & Key	
	2	B-0199-06	VR 2.2 GPM Aerator, 55/64-27 Female w/ Key	
	3	009538-45	Swivel Washer	
	4	011429-45	Swivel Sleeves (2)	
	5	001074-45	O-Ring	
	6	014200-45	Star Washer, Anti-Rotation	
	7	019087-45	6VDC Lithium Battery, CR-P2	
	8	019088-45	Auxiliary Power Connector Cable	
	9	019082-45	Lever Asm & Body Screw Kit w/ L-Key	
	10	013433-40	4" Universal Deck Plate, Gasket & Mounting Hardware	
	11	018544-45	Flexible Stainless Steel Hose w/ Check Valve Adapter	
	12	5EF-0002	AC Transformer	
	13	019086-45	Body Plug, Pre-Set Temperature	



A maximum of (8) ChekPoint faucets can be powered by EC-HARDWIRE ChekPoint Hardwire AC Transformer when connected using EC-ADEWIRE cables. (Both sold separately)



Optional Plug Replaces Lever Handle When Pre-setting Temperature (Installs from Inside of Body)



015425-45 VR Aerator Key



018543-45 Torx T-20 VR L-Key

Flow Control Switches are Located Behind the Sensor. Remove Battery to Access Switches.

- Switches are set to DEFAULT position:
  - Auto Time Out = 15 seconds
  - Shut Off Delay = 1 second
  - Auto Flush = OFF
- **Available Water Flow Control Selections:**
- Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
- Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

## **Product Specifications:**

Chrome Plated Brass Above Deck Electronics Faucet, Deck Mount, 4" c/c Deck Plate, Swivel/Rigid Gooseneck, 2.2 GPM VR Aerator, Point-of-UseTemperature Control, Battery or AC Adapter Powered, Stainless Steel Flexible Supply Lines & 3/8" Compression Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: KJG Checked: JRM Approved: Date: 08/26/16 Scale: NTS Sheet: 2 of 2